



DP15

HEAVY DUTY TWO POST LIFT
15,000 lbs. Capacity



FEATURES:

Symmetrical column design

2-stage front and rear arms

Three height configuration models for most ceiling heights


Top mounted direct pull technology

- Cylinder rod concealed inside carriage
- Overhead cable equalization
- Single point lock release
- Spring operated arm restraints
- Includes adapter storage
- Durable powder-coated finish
- ALI certified

2-STAGE FRONT AND REAR ARMS

Designed with heavy-duty reinforced gusseting

- 2-stage arms extend and retract from 61" to 38"
- 5 1/2" minimum adapter height from floor

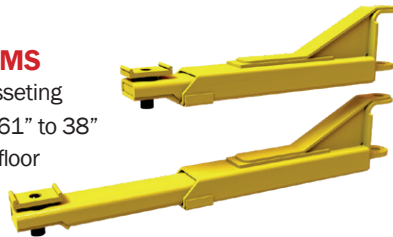

INCLUDES THREADED TRUCK ADAPTERS AND (4 each) 5" and 10" ADAPTER EXTENSIONS

SPECIFICATIONS

BL=Blue Lift / RD= Red Lift

THREE OVERALL HEIGHT OPTIONS / MODELS

DP15N000BL / RD	12' 10 3/4" Low Ceiling
DP15N001BL / RD	14' 7" Standard Height
DP15N002BL / RD	16' 7" Extended Height
Capacity	15,000 lbs.
Rise with 10" Adapter Extension	83 1/4"
Height to Shut-Off	147 1/4" Low Ceiling 167 1/4" Standard Height 191 1/4" Extended Height
Overall Width	12' 10 3/8"
Inside Columns	119 5/8"
Drive-Thru	108 1/4"
Arm Reach (Min/Max)	38" / 61"
Minimum Adapter Height	5 1/2"
Voltage/Amps	208V - 230V, 17 amps
Motor/Phase	2HP / 1Ph
MINIMUM REQUIRED CEILING HEIGHT	
DP15N000BL / RD	12' 11 3/4" Low Ceiling
DP15N001BL / RD	14' 8" Standard Height
DP15N002BL / RD	16' 8" Extended Height



FWD DP15N002BL
Extended Height Lift



ALI GOLD CERTIFIED

Forward Lift DP15 meets the highest industry safety and performance standards. Your assurance of certification is the gold ALI/ETL certified label.



www.forwardlift.com



996 Industrial Drive
Madison, IN 47250

Phone: 800.423.1722
Fax: 812.273.7329

